# NFP75FAF

**2MP/5MP/8MP 4-in-1 cameras**

**NFP75FAF -GCAT200HB**

**NFP75FAF -GCAT500EC**

**NFP75FAF - SCAT800**

- IP 67 Full metal bullet
- 2MP-5MP-8MP available
- 2.8-12 mm/2.7-13.5 Motorized lens
- 6PCS Array LED, up to 30m

| Specification | | | |
|---|---|---|---|
| Model No. | NFP75FAF-GCAT200HB | NFP75FAF -GCAT500EC | NFP75FAF - SCAT800 |
| Video Output Mode | AHD/CVI/TVI/CVBS | | |
| **Camera** | | | |
| Image Sensor | 1/2.9"COMS Sensor | 1/3"COMS Sensor | 1/2.8"SONY COMS Sensor |
| Image Resolution | 2M:1920*1080 | 5M:2560*1944 | 8M:3840*2160 |
| TV System | PAL/NTSC | | |
| Electronic Shutter | Auto | | |
| Minimum Illumination | 0.01Lux(F1.2) | 0.05Lux(F1.2) | 0.01Lux(F1.2) |
| | B&W：0LUX | | |
| **Lens** | | | |
| Motorized lens | 2.8-12mm for 2mp-5mp, 2.7-13.5mm for 8mp | | |
| **Night Vision** | | | |
| IR Cut Filter | YES | | |
| Infrared LED | 6PCS Array IR LED | | |
| Light Distanc | Up to 30M | | |
| **Camera Features** | | | |
| Day/Night | Dual filter switcher，AUTO/Color/B&W/EXT | | |
| OSD Menu | YES | | |
| WDR | DWDR | DWDR | WDR |
| Noise Reduction | 3-DNR | DNR | 3-DNR |
| AWB | GRAY WORLD/ATW/MWB | ATW/MWB | PRO/GRAY WORLD/ATW/MWB |
| MIRROR / FLIP | CLOSE/OPEN | | |
| UTC | YES | | |
| Gain Control | Auto | | |
| **General Specification** | | | |
| Housing | Metal, IP67 | | |
| Bracket | YES | | |
| Operation Temperature | (-10℃ ~ +60℃ ) RH95% MAX | | |
| Storage Temperature | (-20℃ ~ +60℃) RH95% Max | | |
| Power Source | DC12V±10%, 760mA | | |
| Dimension | 262(L)×83(W)×75(H) | | |
| Weight | 920g | | |
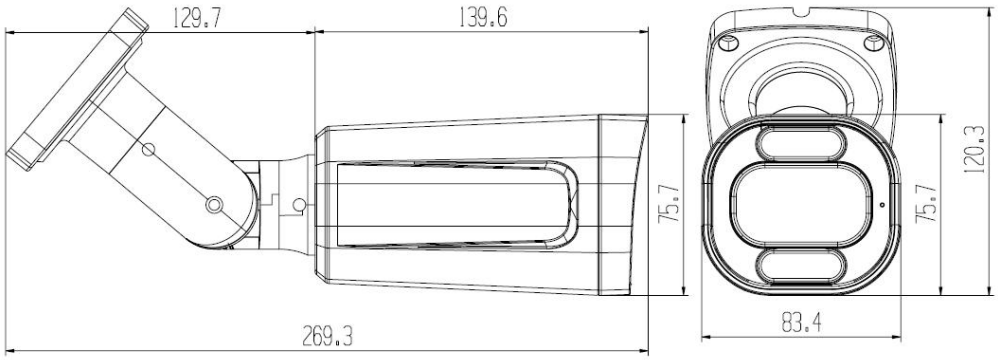
# Dimensions(mm)