XVR6104E1-3

Key Features :

Support H.265/H.264 video formats

Support audio over coaxial cable

Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access

4channel BNC input

Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080

Long transmission distance over coax cable

Specification

Video/Audio Input	
Analog Video Input	4-ch, BNC
IP Video Input	2-ch(only IP up to 6ch), each channel up to 4MP
Supported Analog Camera Types	**Support AHD input:** 5MP@20fps(The first channel) 5MP@12fps 4MP@30fps 1080P@30fps 720P@60fps **Support TVI input:** 5MP@20fps(The first channel) 5MP@12fps 4MP@30fps

	1080P@30fps 720P@60fps **Support CVI input:** 5MP@20fps(The first channel) 4MP@30fps 1080P@30fps 720P@30fps **Support CVBS input**
Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
Network	
Incoming Bandwidth	48Mbps
Outgoing Bandwidth	60Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	4-ch
Encoding	
Recording Resolution	5MP Lite/4MP Lite/1080P/720P/4CIF/CIF
Recording Frame Rate	**Main stream:** 5MP Lite@12fps 4MP Lite@15fps 2MP@15fps 720P@25fps **Sub stream:**

	D1@25fps(Max)
Hard Disk	
SATA	1 SATA interface
Capacity	Up to 6TB for each HDD
External Interface	
Network Interface	1RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel:2 x USB2.0
General	
Power Supply	12V DC Power Consumption: ≤ 8 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	260mm × 218mm × 47mm (10.2" × 8.6" × 1.9")
Weight (without HDD)	≤1.1 Kg (2.42lb)

Dimensions

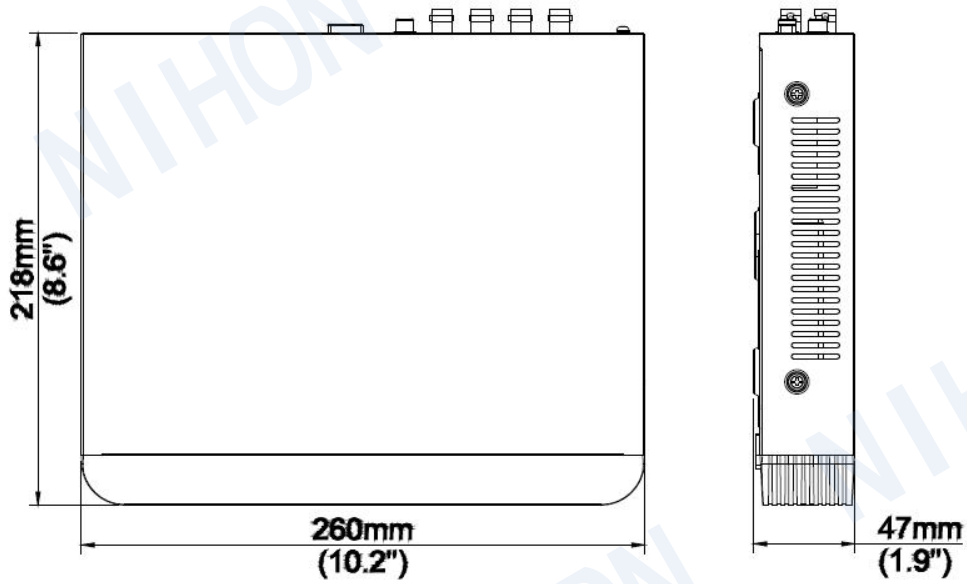

Rear Panel
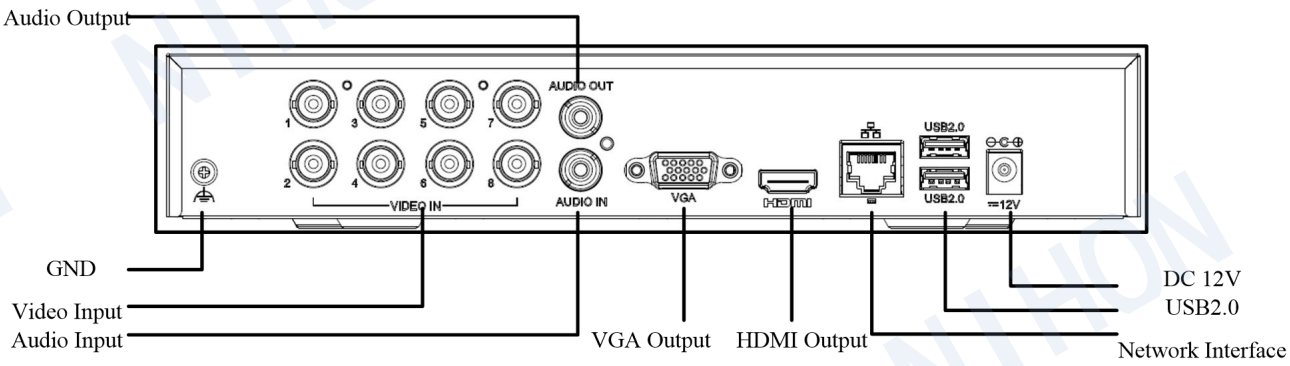
Take XVR6104E1-3 for example